

ISO Air conditioning support bracket fastening

For external insulation

2 FIXATIONS HAUTES



2 FIXATIONS BASSES



Fixation de support de clim ISO

Description

- Air conditioning support bracket fastening for external insulation.
- HIGH fixing (x 2): double-thread screw threaded M10 x 30 mm + long plug + threaded washer M10 (avoids crushing of the insulation when tightening) + washer M10 + nut M10 + 1 nut to Concrete
- LOW fixing (x 2): double-thread screw threaded M10 x 30 mm + long plug + threaded washer M10 (avoids crushing of the insulation when tightening) + washer M10 + nut M10 + 1 nut to counter -nut.

Product benefits


- The threaded washer and the support washer prevent the crushing of the insulation.
- Easy and fast.
- Robust.
- All materials and ideal for hollow materials.
- Made in France.
- In hollow materials, expansions on several cells of the support.
- 100% polyamide 6 nylon plug.
- Anti-rotation fins.

Homologations



CSTB

Materials

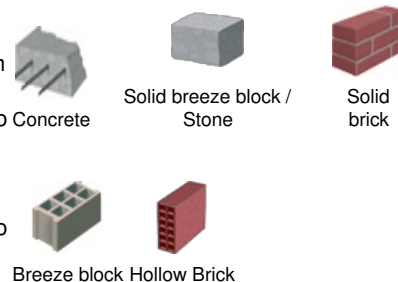

Références produits

DÉSIGNATION	RÉFÉRENCE	CONDT	SURCONDT	LENGTH	FINITION
FIXATION SUPPORT DE CLIM 16 X 240 Sachet de 4	A150320	Sachet de 4	5 sachets	240 mm	Acier
FIXATION SUPPORT DE CLIM 16 X 240 INOX A4 Sach. de 4	A150322	Sachet de 4	5 sachets	240 mm	Inox A2
FIXATION SUPPORT DE CLIM 18 X 300 Sachet de 4	A150330	Sachet de 4	5 sachets	300 mm	Acier

Technical informations - Implementation data

Ø PLUG	PLUG LENGTH	DRILLING		ISOLATION MINI-MAXI	
		HOLLOW MATERIALS	SOLID MATERIALS	HOLLOW MATERIALS	SOLID MATERIALS
Ø16 + SCREW Ø12	240 mm	Ø16	Ø17	80-110 mm	130-160 mm

Ø PLUG	PLUG LENGTH	DRILLING		ISOLATION MINI-MAXI	
		HOLLOW MATERIALS	SOLID MATERIALS	HOLLOW MATERIALS	SOLID MATERIALS
Ø18 + SCREW Ø14	300 mm	Ø18	Ø19	120-170 mm	170-220 mm