

## Double thread screw directly into concrete

### Self-tapping double thread screw directly into concrete

#### Description

- Self-tapping double thread screw directly into concrete.
- Hardened steel with Cr3+ zinc coating.
- Can be installed using an impact screwdriver and a 10 mm socket.



Vis double filet directe béton

#### Product benefits

- No wall plug required: quick and economical installation.
- Approved for cracked and non-cracked concrete.
- Fire resistant.

#### Uses

- Fixing of heavy series clamps, rainwater downpipe clamps, etc.

#### Homologations



ETA option 1 for cracked and non-cracked concrete

#### Materials




Cracked concrete Concrete

#### Références produits

DÉSIGNATION	RÉFÉRENCE	CONDT	SURCONDIT	THREAD	DRILLING
VIS DOUBLE FILET DIRECTE BÉTON M8 Bte de 50	A244205	Boîte de 50	Aucun	M8	Ø 6 mm

#### Technical informations - Implementation data

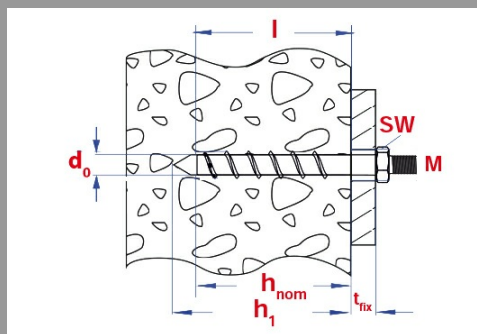

	L CONCRETE THREAD	M METRIC THREAD	SW HEXAGON SIZE	D0 DRILLING DIAMETER	H1 DRILLING DEPTH	HNOM ANCHORING DEPTH	T <sub>FIX</sub> MAX. THICKNESS TO BE FIXED
M8	35 mm	35 mm	10 mm	6 mm	40 mm	35 mm	0 mm