

Resin SOC

Polyester-polyvalent resin, all materials



Résine SOC 300 ml

Description

- Colour: beige.
- Supplied with 2 mixing nozzles.

Product benefits

- Can be filled in ceilings without any accessories.
- Grade 4.6, 5.8 and 6.8 galvanised steel – A4-70 and A4-80 stainless steel.

Uses

- Signs, doorways, shutter pintles, joist hangers, awnings, water heating systems, air-conditioning units, plumbing fixtures, antenna, angle brackets for cladding etc.

Homologations



ETE 18/0137.

A+.

Materials



Concrete



Solid breeze block /
Stone



Solid
brick



Breeze block



Hollow Brick



Aerated concrete

Références produits

DÉSIGNATION	RÉFÉRENCE	CONDT	SURCONDT	COLOR	QTY
KIT 300 ML SOC + TIGES FILET. 10 X 160	A859870	Kit	5 kits	Beige	300 ml
RESINE SOC PROMO 2 CANULES La Cart. (Pour BOX de 90 p.)	A992015	Box de 90	Aucun	Beige	300 ml
RESINE SOC PROMO La cartouche (cart. de 12 et 24 canules)	A992015B	Carton de 12	8 cartons	Beige	300 ml

Technical informations - Average indicative loads (kg)

	Ø 6	Ø 8	Ø 10	Ø 12	Ø 16
HOLLOW MASONRY	100	100	100	100	100
CONCRETE	400	750	850	1000	1200

Refer to ETA

Technical informations - Drying time and time until fixing can be loaded


TEMPÉRATURE	HANDLING TIME	TIME UNTIL FIXING CAN BE LOADED
- 5 °C	40 min	180 min

TEMPÉRATURE	HANDLING TIME	TIME UNTIL FIXING CAN BE LOADED
5 °C	20 min	90 min
15 °C	9 min	60 min
25 °C	5 min	30 min
35 °C	3 min	20 min

Store at a temperature between 5°C and 25°C.
For wet holes, double the loading time.

Technical informations - Utilisation

HOLLOW MATERIALS

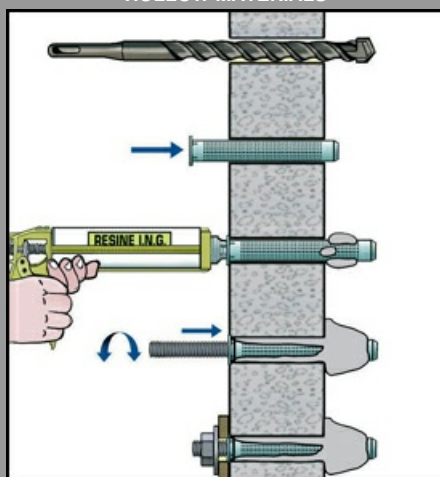

SOLID MATERIALS

