

CQLV wall plug Ø8

Long wall plug Ø 8 with countersunk head screw



Cheville CQLV Ø8

Description

- Long wall plug with countersunk head screw with Torx T30 drive.
- All materials.
- Wall plug Ø8: countersunk head screw Ø5.5.
- Countersunk head screw features white zinc plating.

Product benefits

- In hollow materials, the wall plug forms a wedged connection for secure and robust anchoring.
- In solid materials, the wall plug spreads in four directions.
- Wall plug 100% nylon polyamide 6.
- Quick and easy: Installation through the part to be affixed.

Uses

- Battens, wall plates, brackets etc.

Homologations



ETA 12/0261

Materials



Concrete



Solid breeze block /
Stone




Solid
brick



Breeze block



Hollow Brick



Cheville CQLV Ø8 - vue en coupe dans la
brique



Cheville CQLV Ø8 - vue en coupe dans le
béton


Références produits

DÉSIGNATION	RÉFÉRENCE	CONDIT	SURCONDIT	LENGTH
CHEVILLE CQLV 8 X 80 Bte de 25	A090165	Boîte de 25	Aucun	80 mm
CHEVILLE CQLV 8 X 100 Bte de 25	A090170	Boîte de 25	Aucun	100 mm
CHEVILLE CQLV 8 X 120 Bte de 25	A090175	Boîte de 25	Aucun	120 mm
CHEVILLE CQLV 8 X 140 Bte de 25	A090180	Boîte de 25	Aucun	140 mm
CHEV. CQLV 8 X 80 Sachet de 10	A858692	Sachet de 10	15 sachets	80 mm
CHEV. CQLV 8 X 100 Sachet de 10	A858693	Sachet de 10	15 sachets	100 mm
CHEV. CQLV 8 X 120 Sachet de 10	A858694	Sachet de 10	15 sachets	120 mm
CHEV. CQLV 8 X 140 Sachet de 10	A858695	Sachet de 10	15 sachets	140 mm

Technical informations - Average indicative loads (kg)

	Ø 8
HOLLOW MATERIALS	80
SOLID MATERIALS	200

Technical informations - Implementation data

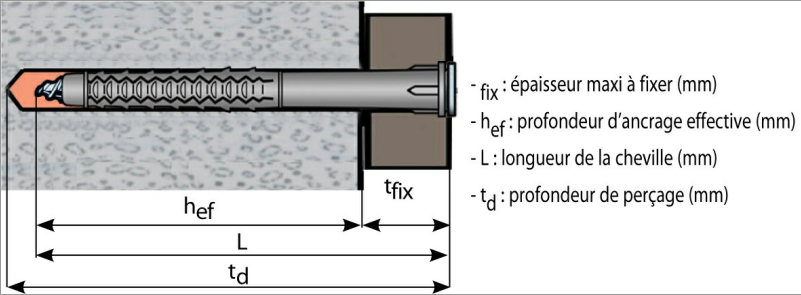						
Ø PLUG	L	T _D	DRILLING	T _{FIX}	H _{EF}	DRIVE
Ø8 + SCREW Ø5,5	80 mm	90 mm	Ø8	10 mm	70 mm	Torx T30
	100 mm	110 mm	Ø8	30 mm	70 mm	Torx T30
	120 mm	130 mm	Ø8	50 mm	70 mm	Torx T30
	140 mm	150 mm	Ø8	70 mm	70 mm	Torx T30