



Wall plug for joist hanger

Wall plug for joist hanger / fixing kit

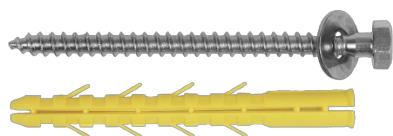

Cheville sabot de charpente



Cheville sabot de charpente - vue en coupe

Description

- Wall plug Ø12 x 130, slit lengthwise.
- Lag screw, Ø10 x 140, fully threaded.
- Ideal for hollow materials.

Product benefits

- Made in France.
- Complete expansion.
- In hollow materials, the wall plug opens up into several holes in the substrate.
- Wall plug 100% nylon polyamide 6.
- Quick and easy: Installation through the part to be affixed.

Uses

- Joist hangers, satellite dishes, brackets for air-conditioning units etc.

Materials



Concrete



Solid breeze block / Stone



Solid brick



Breeze block



Hollow Brick


Références produits

DÉSIGNATION	RÉFÉRENCE	CONDT	SURCONDT	LENGTH
CHEV. SABOT CHARPENTE 12X 130 ZG BLANC Bte de 25	A090150	Boîte de 25	Aucun	130 mm
KIT DE FIXATIONS 12X130 Sachet de 4	A853035	Sachet de 4	20 sachets	130 mm

Technical informations - Average indicative loads (kg)

	Ø 12
HOLLOW MATERIALS	100
SOLID MATERIALS	300

Technical informations - Implementation data

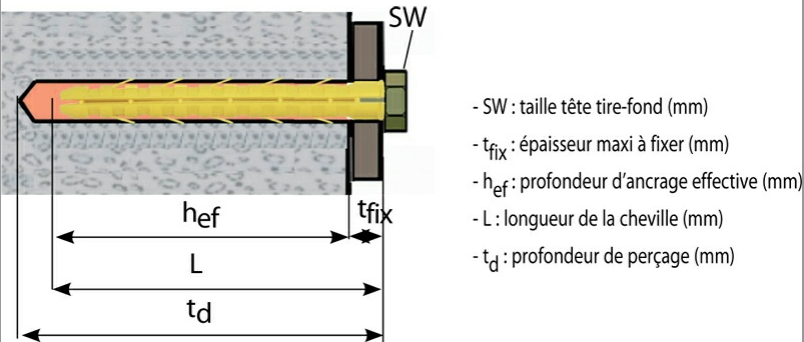

SOLID MATERIALS						HOLLOW MATÉRIALS			
Ø PLUG	L	T _D	DRILLING	T _{FIX}	H _{EF}	DRILLING	T _{FIX}	H _{EF}	SW
Ø12 + LAG SCREW Ø10	130 mm	140 mm	Ø13	50 mm	80 mm	Ø12	5 mm	125 mm	17

Manual screwing in hollow brick for optimal fixing.